



Nikon FE/FM/FA Series Model(s) - Shared Resources
The MD-11 Motor Drive - Main Reference Map and Specifications

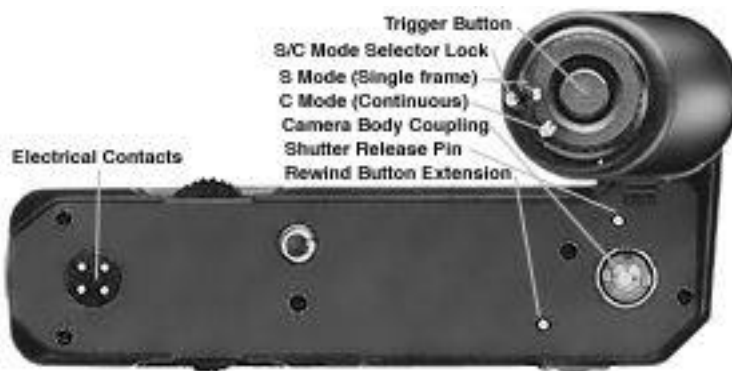


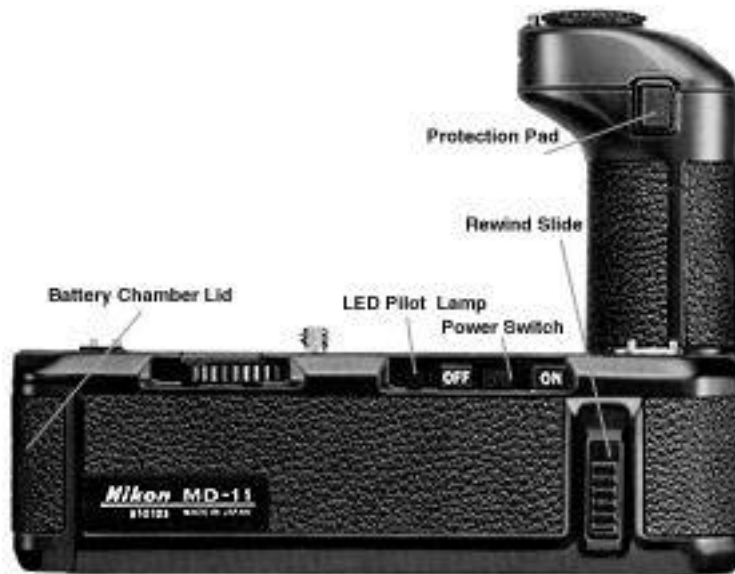

Specification for MD-11 Motor Drive

Camera fitting:	Nikon FM, FE, FM2, FE2, FMT, FA and FM2n, screw-on type connect
Shooting speed:	Up to approx. 3.5 frames per second (fps) at a shutter speed of 1/125, Sec progressively lower rate at slower shutter speeds
Shutter release:	Via trigger button on the hand grip with camera's mode selector set to red position
Shooting modes:	Continuous (C setting) or single (S setting)
Usable shutter speeds:	1/2 to 1/1000 sec. for C setting 1 to 1/1000 Sec. for S setting for FM; 8 to 1/4000 sec. for FE, 1 to 1/4000 sec for FM(n), 8 to 1/4000 sec for FE2 and FA
Power source:	8 AA-type 1.5V penlight batteries housed in integral battery chamber, Allow 100 rolls of 36 exposure films at the C setting at normal temperature, works with Carbon-type and nickel-cadmium (NiCd) batteries as well (Power consumption info)
Pilot Lamp:	Built-in LED type. Lights up intermittently during operation to indicate proper winding; glows continuously when film is exhausted at the end of roll.
Power switch:	ON/OFF switch provided; also functions as camera's metering switch
Remote control operation:	Terminals provided for optional remote accessories
Dimensions:	144mm (W) x 68.5mm (D) x 109.5mm (H)
Weight:	410g (without batteries)

* **Credit:** Shriro Malaysia, distributor of Nikon optical products for providing this manual. The technical team members in Shriro.



As some of the site may require this plug-in to view, please have your application installed.



[Home](#) - Photography in Malaysia

Copyright ©1998 [leofoo](#)®. MIR WEB Development Team;
a contributing effort to [Michael](#) C Liu's [Classic Nikon](#) Site.

* Credit: Miss Riza (Marketing) & members of the Technical Service dept of Shiro Malaysia,
Distributor of Nikon cameras in Malaysia & Singapore, in providing so many useful input to make this
site possible.